


FIRE ALARM FPLP 14/2 SOLID UNSHIELDED CABLE

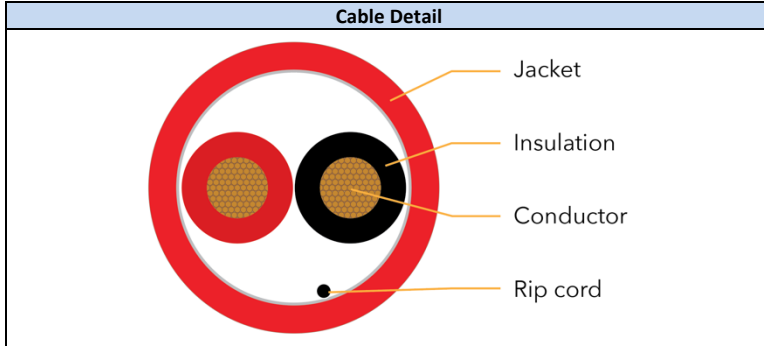

Applicable Standards

- C(UL) listed FPLP
- RoHS Compliant (EU) 2015-863

Physical Characteristics

Conductor Material	Solid Bare Copper
Number of Conductors	2
AWG	14 AWG
Stranding	Solid
Overall Diameter	1/1.63 mm
Insulation Material	PVC
Insulation Diameter	2.10 mm Nom.
Average Thickness	0.23 mm Nom.
Jacket Material	PVC PLENUM
Jacket Diameter	5.1 mm Nom.
Average Thickness	0.38 mm
Nominal Weight	-- lbs.
Shielding (Y/N)	No
Ripcord (Y/N)	Yes
Drain Wire (Y/N)	No

Insulation Colors

Black / Red

Part Numbers	Jacket Color	Package
FC1402UPRD2	Red	1000FT / Reel

Mechanical Characteristics

Operating Temperature	-20°C to + 75°C
Insulation Elongation	≥ 100%
Tensile Strength	≥ 13.79 Mpa
Jacket Elongation	≥ 100%
Tensile Strength	≥ 17.24 Mpa
Aging Condition	100°C ±2°C x 240 hours
	Elongation Retention ≥ 65%
	Tensile Strength Retention ≥ 85%
Cold Bend	-20°C / 4 hours (No Cracking)

Electrical Characteristics @ 20°C

DC Resistance	14AWG: 8.45 Ohms/Km Max.
Voltage Rating	300 V
Voltage Resistance	AC 1.5 KV/60S
Flame Retardance	FPLP

Cable Marking

EXXXXXX 14AWG 2/C PLENUM UNSHIELDED (UL) FPLP
DEVICE/ZONE A B C D E F 1 2 3 4 5 6 7 8 RoHS ****FT

