


Control Cable 22AWG 6C Riser (CMR) Shielded Stranded

Cable Detail

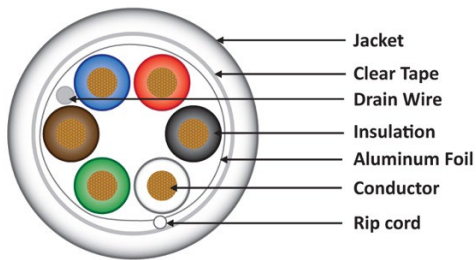

Cable Marking

22AWG 6C SHIELDED CMR TYPE XXXXXXXX C(ETL)US
****FT

Part Numbers	Jacket Color	Package
CC2206SRGY4	Grey	1000ft / Reelex II
CC2206SRWH1-500	White	500ft / Reelex II

Approval



Applicable Standards

- Power-limited control circuits
- Wiring of the following systems: Security / Audio / Background music
- Reference Standard: UL 444 / ETL: CL2R/CMR

Physical Characteristics

Conductor Material		Stranded Bare Copper
AWG		22AWG
Conductor	(mm)	7 / 0.254
Insulation Material		PVC
Average Thickness	(mm)	0.2
Min. Point Thickness	(mm)	1.05
Number of Conductors		6
Lay Length		Parallel
Shield		AL-PET Tape
Drop Wire		7 x 0.254 Tinner Copper
Jacket Material		FR-PVC
Average Thickness	(mm)	0.5
Outer Dia.	(±0.2mm)	3.70
Insulation colors		Black / Red / White / Green / Brown / Blue
Nominal Weight	1000 ft.	25 lbs.