


FIRE ALARM FPLR 18/4 SOLID SHIELDED CABLE



Cable Detail

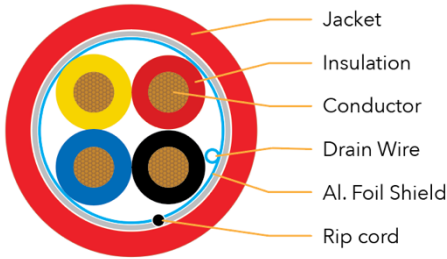

Applicable Standards

- C(UL) listed FPLR
- RoHS Compliant (EU) 2015-863



Cable Marking

EXXXXX 18AWG 4/C SHIELDED (UL) FPLR DEVICE/ZONE
A B C D E F 1 2 3 4 5 6 7 8 RoHS ****FT

Insulation Colors

Black / Red / Yellow / Blue

Part Numbers	Jacket Color	Package
FC1804SRRD2	Red	1000FT / Reel

Physical Characteristics

Conductor Material	Solid Bare Copper
Number of Conductors	4
AWG	18 AWG
Conductor Diameter	1.02 (mm)
Insulation Material	PVC
Average Thickness	0.265 (mm)
Min. Point Thickness	0.240 (mm)
Diameter	1.55 (±0.05mm)
Drain Wire (Stranded TC) Dia.	7/0.25 (±0.003mm)
Al Foil Shield	YES (mm)
Assembly Diameter	3.85 (±0.1mm)
Jacket Material	PVC
Average Thickness	0.45 (mm)
Min. Point Thickness	0.40 (mm)
Diameter	4.80 (±0.1mm)
Rip Cord	Yes
Nominal Weight	34 (pounds)
Rated Temperature	75 (°C)

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before Tensile Strength	≥13.8 (Mpa)
Aging Elongation	≥100 (%)
Aging Condition	100x168 (°Cxhrs)
Before Tensile Strength	≥85% of unaged (Mpa)
Aging Elongation	≥50% of unaged (%)
Cold Bend (-20±2°Cx4hrs)	No Crack

