


# CAT 6 550MHz UTP PLENUM (CMP) 23/4 NO SPLINE UNSHIELDED FT6 CABLE

### Cable Detail

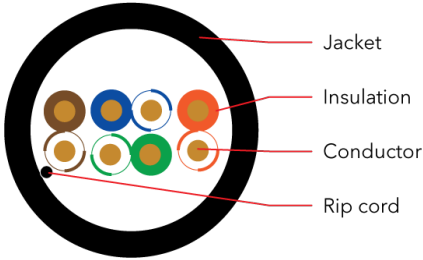

### Applicable Standards

- C(UL) listed FT6 CMP
- C(UL)US Verified to TIA-568-C.2
- ROHS Compliant



### Physical Characteristics

Conductor Material	Solid Bare Copper
Number of Conductors	4
AWG	23 AWG
Stranding	Solid
Insulation Material	FEP
Overall Diameter	0.037 in
Average Thickness	0.0088 in
Jacket Material	Flame Retardant PVC
Average Wall Thickness	0.023 in.
Nominal Outer Diameter	0.205 in.
Nominal Weight	26 lbs.
Shielding (Y/N)	No
Ripcord (Y/N)	Yes
Separator (Y/N)	No

### Mechanical Characteristics

Temperature Range	Installation	0°C to + 75°C
	Operating	-20°C to + 75°C
Tensile Strength	Before	>= 13.8 Mpa
Elongation	Aging	>= 100%
		100°C x 168 hours
	After	>= 85% of unaged
Aging Condition	Aging	>= 50% of unaged

### Insulation Colors

Pair 1	White / Blue	Blue
Pair 2	White / Orange	Orange
Pair 3	White / Green	Green
Pair 4	White / Brown	Brown

Part Numbers	Jacket Color	Package
<b>6E04UPSPLSXX4N</b>	Black, Blue, Green, Grey, Orange, Red, Yellow, White	1000FT / Reelex II

### Electrical Characteristics

DC Resistance	9.38 Ω / 100m Max. @ 20°C
Resistance Unbalanced	5% Max. @ 20°C
Capacitance Unbalance	330 pF / 100m Max. @ 20°C
Mutual Capacitance	5.6 nF / 100m Max. @ 20°C
Delay Skew	45 nS / 100m Max. @ 20°C
Nominal of Propagation	69%

### Electrical Performance

Frequency (MHz)	Attenuation (dB/100m) Max.	Return loss (dB) Min.	NEXT (dB) Min.	PS-NEXT (dB) Min.
1	2.0	20.0	77.3	75.3
4	3.8	23.6	68.3	66.3
8	5.3	25.4	63.8	61.8
10	5.9	26.0	62.3	30.3
16	7.4	26.0	59.3	57.3
20	8.3	26.0	57.8	55.8
25	9.3	25.5	56.3	54.3
31.25	10.4	25.0	54.9	52.9
62.5	14.9	23.5	50.4	48.4
100	19.0	22.5	47.3	45.3
155	23.9	21.6	45.8	43.5
200	27.4	21.0	42.8	40.8
250	30.8	20.5	41.3	39.3
300	34.0	20.1	40.2	38.2
350	37.0	19.8	39.2	37.2
400	39.7	19.5	38.3	36.3
450	42.1	19.2	37.5	35.5
500	44.9	19.0	36.8	34.8
550	47.3	18.8	36.2	34.2

Frequency (MHz)	ELFEXT (dB/100m) Min.	PS-ELFEXT (dB) Min.	ACR (dB) Min.	PS-ACR (dB) Min.
1	70.8	67.8	75.0	73.0
4	58.7	55.7	64.0	62.0
8	52.7	49.7	57.7	55.7
10	50.8	47.8	55.6	53.6
16	46.7	43.7	50.7	48.7
20	44.7	41.7	48.2	16.2
25	42.8	39.8	45.6	13.6
31.25	40.9	37.9	42.8	40.8
62.5	34.8	31.8	32.9	30.9
100	30.8	27.8	24.9	22.9
155	27.0	23.6	21.0	21.5
200	24.7	21.7	18.4	16.4
250	22.8	19.8	13.5	11.5
300	21.2	18.2	9.6	5.0
350	19.9	16.9	5.2	3.2
400	18.7	15.7	1.5	-
450	42.1	19.2	37.5	35.5
500	44.9	19.0	36.8	34.8
550	47.3	18.8	36.2	34.2

\* Values above 250MHz are information only.

### Cable Marking

XXXXXX CATEGORY 6 550MHZ 23AWG 4PR UTP CMP 75C FT6 C(UL)US VERIFIED (UL) ANSI/TIA-568-C.2 \*\*\*\*FT

