


# Control Cable 16AWG 2C

## Plenum (CMP) Unshielded Stranded

### Cable Detail

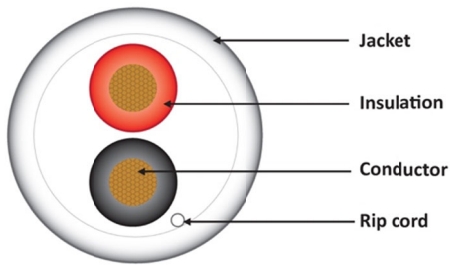

### Approval



### Applicable Standards

- Power-limited control circuits
- Wiring of the following systems: Security / Audio / Background music
- Reference Standard: UL 444 / ETL: CL2P/CMP

### Physical Characteristics

Conductor Material		Stranded Bare Copper
AWG		16
Conductor	(mm)	19 / 0.295
Insulation Material		FR-PVC
Average Thickness	(mm)	0.225
Min. Point Thickness	(mm)	0.19
Insulation Dia.	(±0.03mm)	1.9
Assembly Dia.	(±0.2mm)	3.8
Jacket Material		Low Smoke FR-PVC
Average Thickness	(mm)	0.40
Min. Point Thickness	(mm)	0.35
Outer Dia.	(±0.2mm)	4.60
Rip Cord		Yes
Insulation colors		Black / Red
Nominal Weight	1000 ft.	32 lbs.

### Electrical Characteristics

Max. Recommended Pulling Tension	120 N
Min Bend Installation	35 mm
Storage Temperature Range	-20 ~ +60°C
Installation Temperature Range	0 ~ +50°C
Operating Temperature Range	-20 ~ +60°C
Capacitance	130 Pf/m
DC Resistance (Ω/km) Max	13.9
Spark Test	2.5 kv
Dielectric Test	2 kv/min
Suggested Voltage Rating	300 Volts

### Mechanical Characteristics

Test Object		Jacket
Test Material		PVC
Before	Tensile Strength (Mpa)	>=10
Aging	Elongation (%)	>=100
Aging Condition (°Cxhrs)		100x168
After	Tensile Strength (Mpa)	>=85% of unaged
Aging	elongation (%)	>=50% of unaged
Cold Bend (-20±2°Cx4hrs)		No crack

### Cable Marking

16AWG 2C UNSHIELDED CMP/CL2P TYPE XXXXXXXX C(ETL)US  
\*\*\*\*FT

Part Numbers	Jacket Color	Package
CC1602UPXX4	Customer Request	1000ft / Reelex II