


FIRE ALARM FPLP 16/4 SOLID SHIELDED CABLE



Cable Detail

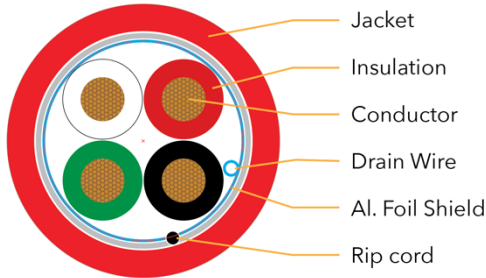

Applicable Standards

- C(UL) listed FPLP
- RoHS Compliant (EU) 2015-863



Physical Characteristics

Conductor Material	Solid Bare Copper
Number of Conductors	4
AWG	16 AWG
Stranding	Solid
Overall Diameter	1/1.29 mm
Insulation Material	PVC
Insulation Diameter	1.8 mm Nom.
Average Thickness	0.23 mm Nom.
Jacket Material	PVC PLENUM
Jacket Diameter	5.2 mm Nom.
Average Thickness	0.38 mm
Nominal Weight	-- lbs.
Shielding (Y/N)	Yes (Aluminum Foil)
Ripcord (Y/N)	Yes
Drain Wire (Y/N)	Yes (Tinned Copper)

Insulation Colors

Black / Red / White / Green

Part Numbers	Jacket Color	Package
FC1604SPRD2	Red	1000FT / Reel

Mechanical Characteristics

Operating Temperature	-20°C to + 75°C
Insulation Elongation	≥ 100%
Tensile Strength	≥ 13.79 Mpa
Jacket Elongation	≥ 100%
Tensile Strength	≥ 17.24 Mpa
Aging Condition	100°C ±2°C x 240 hours
	Elongation Retention ≥ 65%
Cold Bend	Tensile Strength Retention ≥ 85%
	-20°C / 4 hours (No Cracking)

Electrical Characteristics @ 20°C

DC Resistance	16AWG: 13.5 Ohms/Km Max.
Voltage Rating	300 V
Voltage Resistance	AC 1.5 KV/60S
Flame Retardance	FPLP

Cable Marking

EXXXXX 16AWG 4/C PLENUM SHIELDED (UL) FPLP
DEVICE/ZONE A B C D E F 1 2 3 4 5 6 7 8 RoHS ****FT

